

vCam-6 HD INSPECTION SYSTEM

Increase productivity and profitability with the feature-rich vCam-6 inspection camera system. Built tough and reliable for everyday use, the versatile vCam-6 is a good fit for plumbers, contractors, home inspectors, building maintenance supervisors, or anyone looking to inspect the interior of a pipe or duct. Create crisp, detailed HD video inspections with audio comments, text descriptions, footage, date, and timestamps to submit to your customers without worry. Putting in a full days' work is easy with the four-hour battery life and charging on-the-go with the provided AC and DC charging leads.

- 1080p HD camera heads
- 1 Terabyte hard drive
- 4-Hour battery life
- Wi-fi with smartphone/tablet app
- HDMI video/audio port
- One-touch recording and image capture
- One-year warranty
- Camera exchange program
- Backward compatible⁽¹⁾

WiFi - Powerful 150' / 45m Range

Daylight viewable LCD

USB Data port for LACP software interface

Record to 1 TB hard drive or USB

Internal microphone and on-screen distance counter

AC/DC operation with Li-ion rechargeable batteries

Camera test port

Stainless-steel construction reels and camera heads

Full QWERTY keyboard

512Hz/640Hz/33kHz sonde and traceable pushrod

Field serviceable spring, coiled cable and lanyards

Self-leveling 34mm HD Camera

Self-leveling 46mm HD Camera



Backed by Vivax-Metrotech's superior dealer network, customer service and service centers.

Camera Heads

	D34-HD	D46-HD
Dimensions:	1.3" / 34mm x 2.9" / 73mm	1.8" / 46 mm x 2.7" / 68.8mm
Lighting:	12.87 Lumens	44.02 Lumens
Resolution:	1080p	1080p
Construction:	Stainless steel housing with Sapphire Lens	
Environmental:	11 Bar	11 Bar
Field of view:	96 degrees	96 degrees

Type-CP Standard Reel

Dimensions:	28" (L) x 19.7" (W) x 35.8" (H) 710 mm (L) x 500 mm (W) x 910 mm (H)
Construction:	Stainless-steel tubular frame with stainless hardware
Weight:	200 ft. / 60 M of pushrod: 53 lbs. (24 kg) 300 ft. / 90 M of pushrod: 64 lbs. (29 kg) 400 ft. / 120 M of pushrod : 75 lbs. (34 kg)
Environmental:	Water resistant to IP54

Control Module

Dimensions:	14.2" (L) x 5.91" (W) x 12.6" (H) 360 mm (L) x 150 mm (W) x 320 mm (H)
Weight:	12Lbs. / 5.49kg
Screen:	9.7" / 24cm Daylight viewable (1024 x 768)
Battery Life:	Four hour runtime (six hour with sonde off)
Environmental:	Water resistant to IP54 (IEC 60529-Light shower w/ lid closed) Shock resistant (IEC 600682-3-1) (lid closed)

(1) The vCam-6 control module is HD (high definition) when used with the new D34-HD and D46-HD camera heads. The vCam-6 control module is backward compatible with the legacy D18-MX, D26-MX, D34-C, D34-M, and D46-CP analog camera heads but will produce SD (standard definition) video and pictures when used with these cameras.

Authorized Distributor:



**SALES
TRAINING
REPAIR & CALIBRATION**

6981 Eastgate Blvd., Lebanon, TN 37090 / T (615) 285-3952
sales@tracerelectronicllc.com / www.tracerelectronicllc.com



vScan, VM-540 and vLocCam2 Sonde Locators


Popular Accessories




Mini-Reel and Cameras



Rotate and Tilt Mounting Table

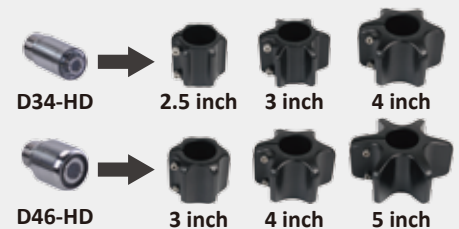

Camera Guide Skids

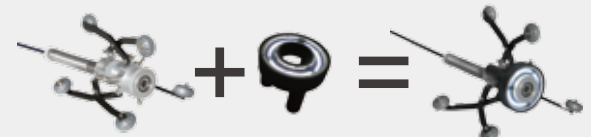

Type-B Adjustable Skid with Light

Vivax-Metrotech Corporation

3251 Olcott Street, Santa Clara, CA 95054, USA

T/Free: 800-446-3392

Tel: +1-408-734-1400

www.vivax-metrotech.com

